

FIGURE 1 EXPRESSOR BAG

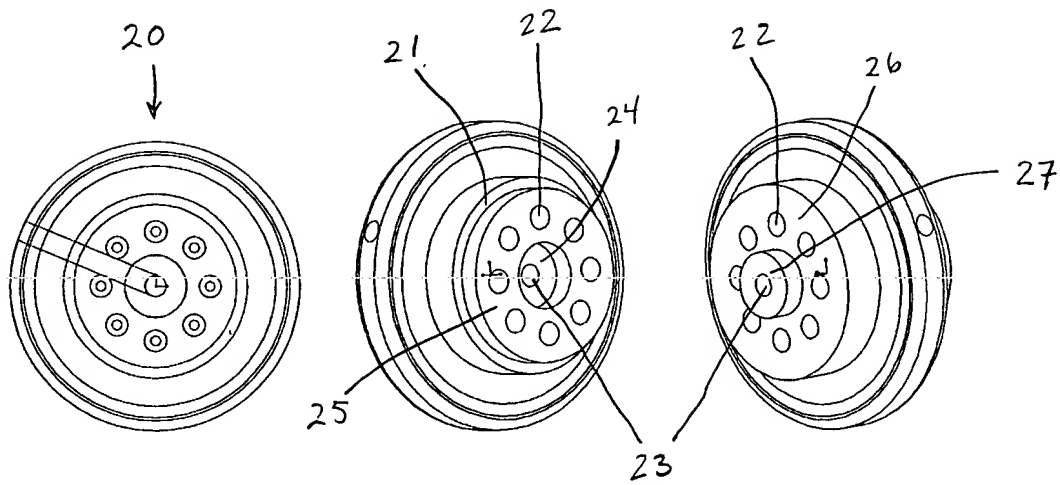


FIGURE 2 EXPRESSOR CENTRAL HUB

WELD RING

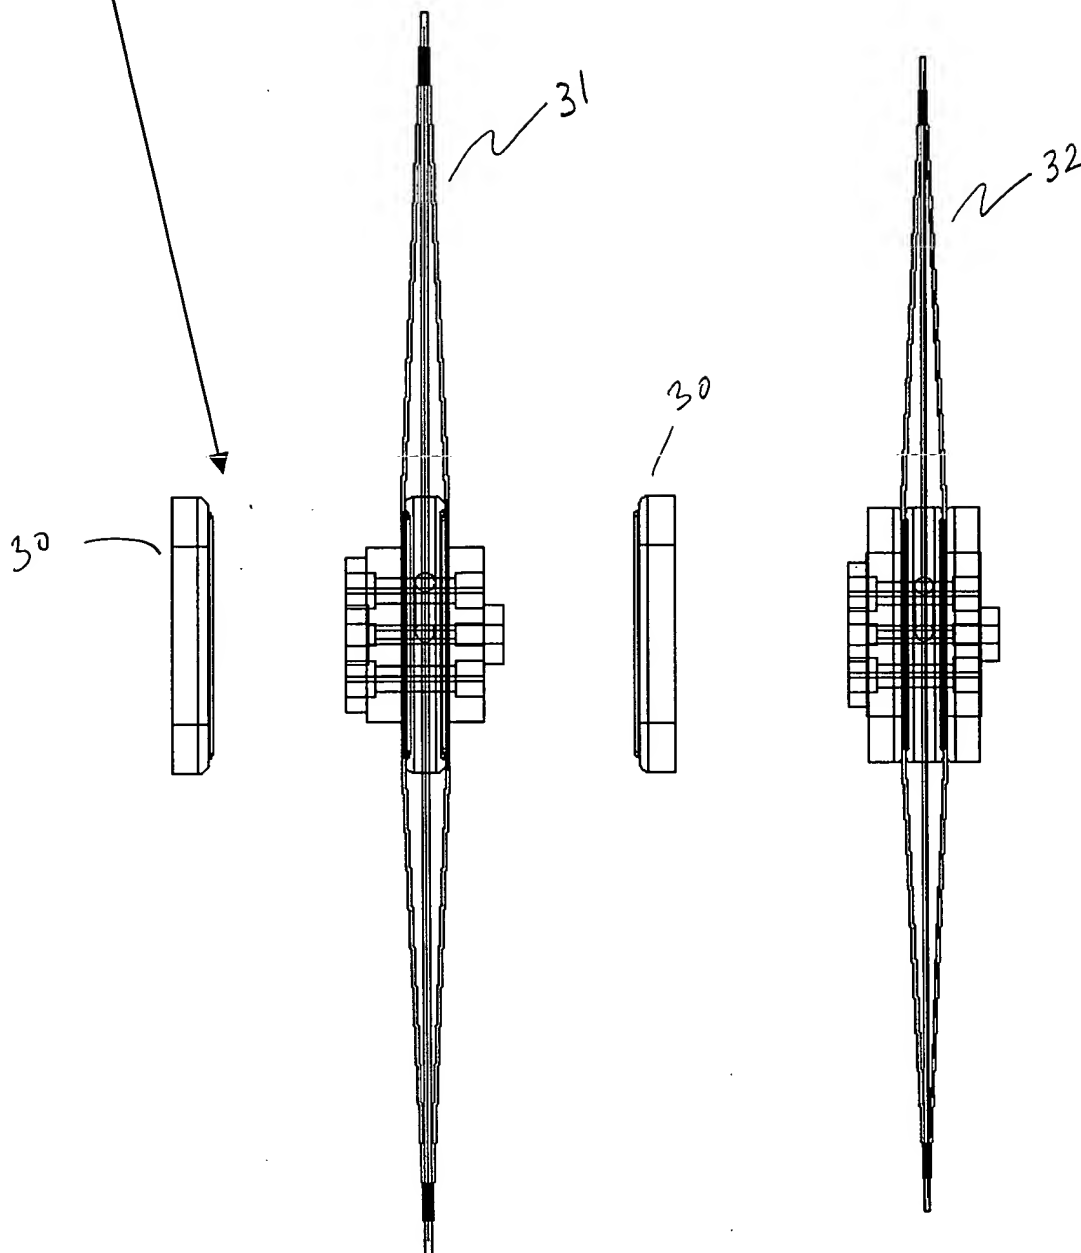


FIGURE 3 EXPRESSOR BAG ASSEMBLY

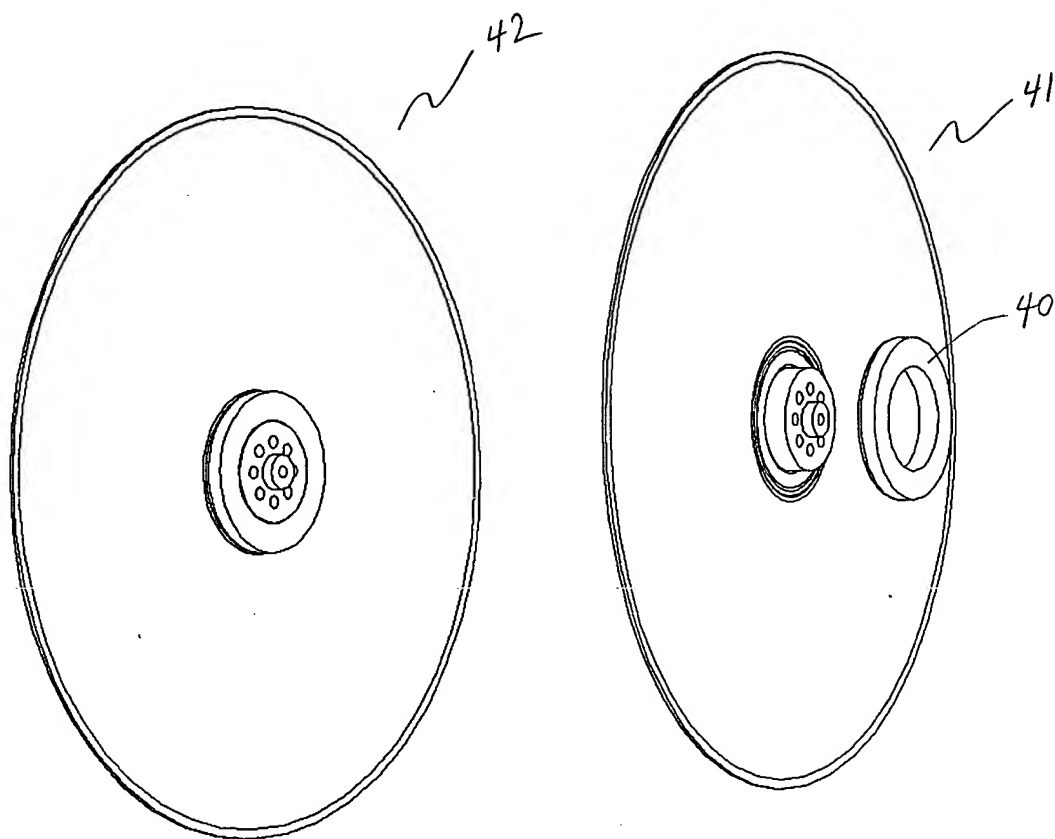


FIGURE 4 EXPRESSOR BAG ASSEMBLY

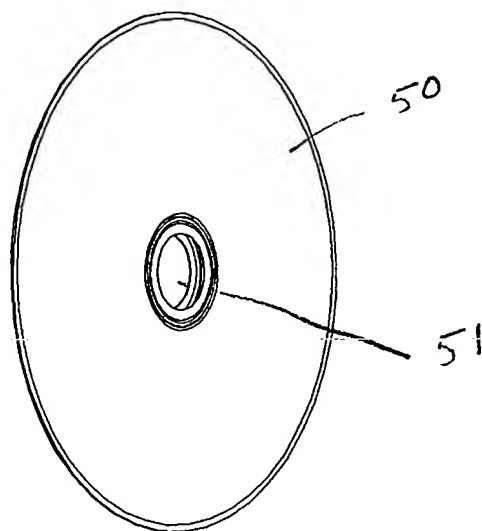


FIGURE 5 PROCESSING BAG

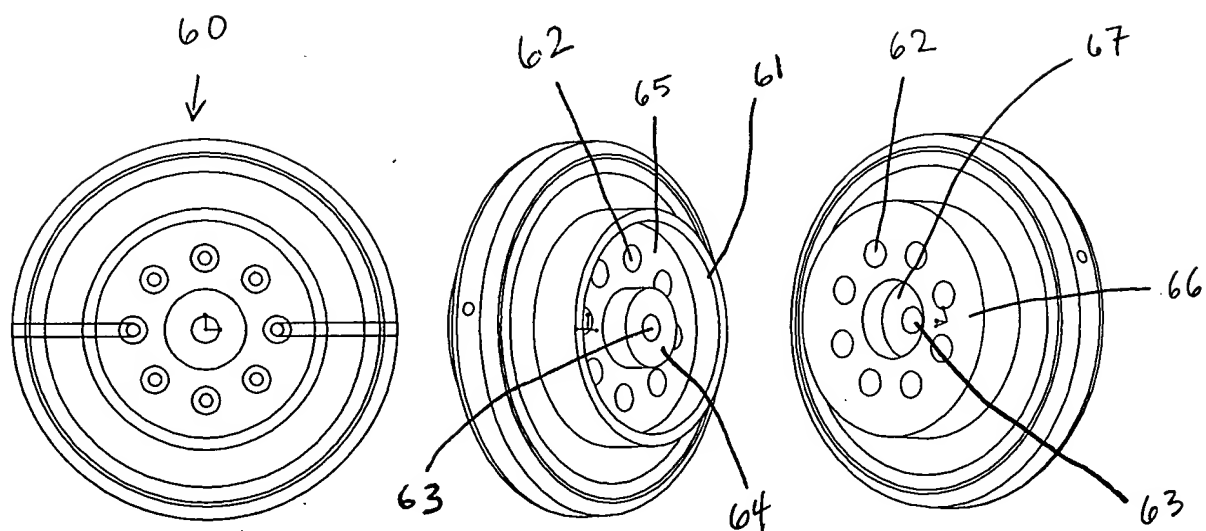


FIGURE 6 PROCESSING CENTRAL HUB

WELD RING

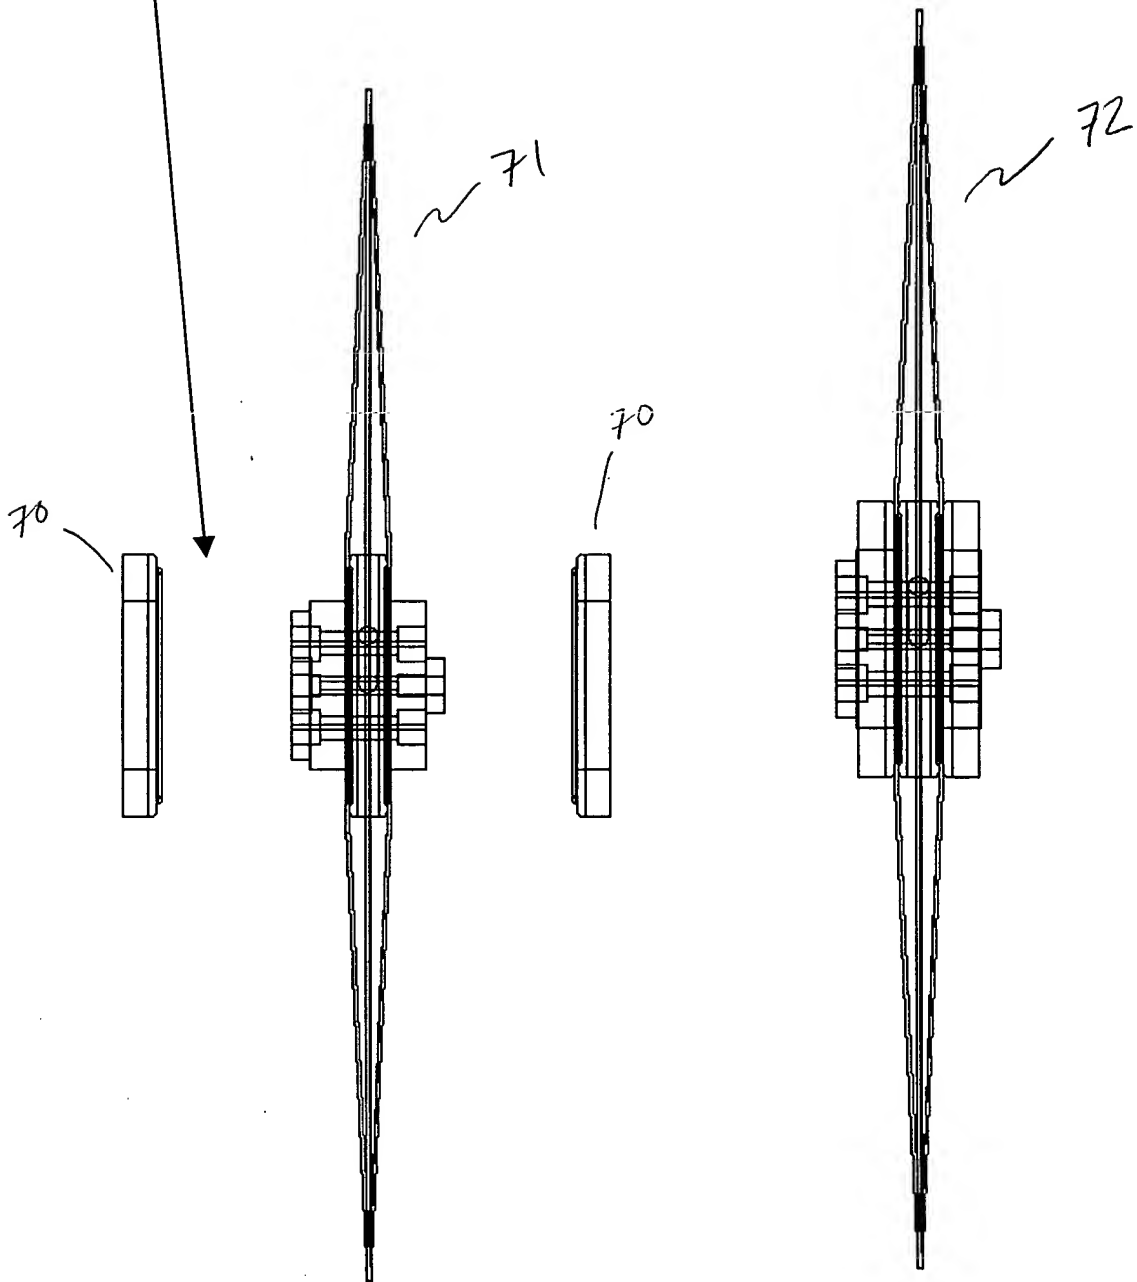


FIGURE 7 PROCESSING BAG ASSEMBLY

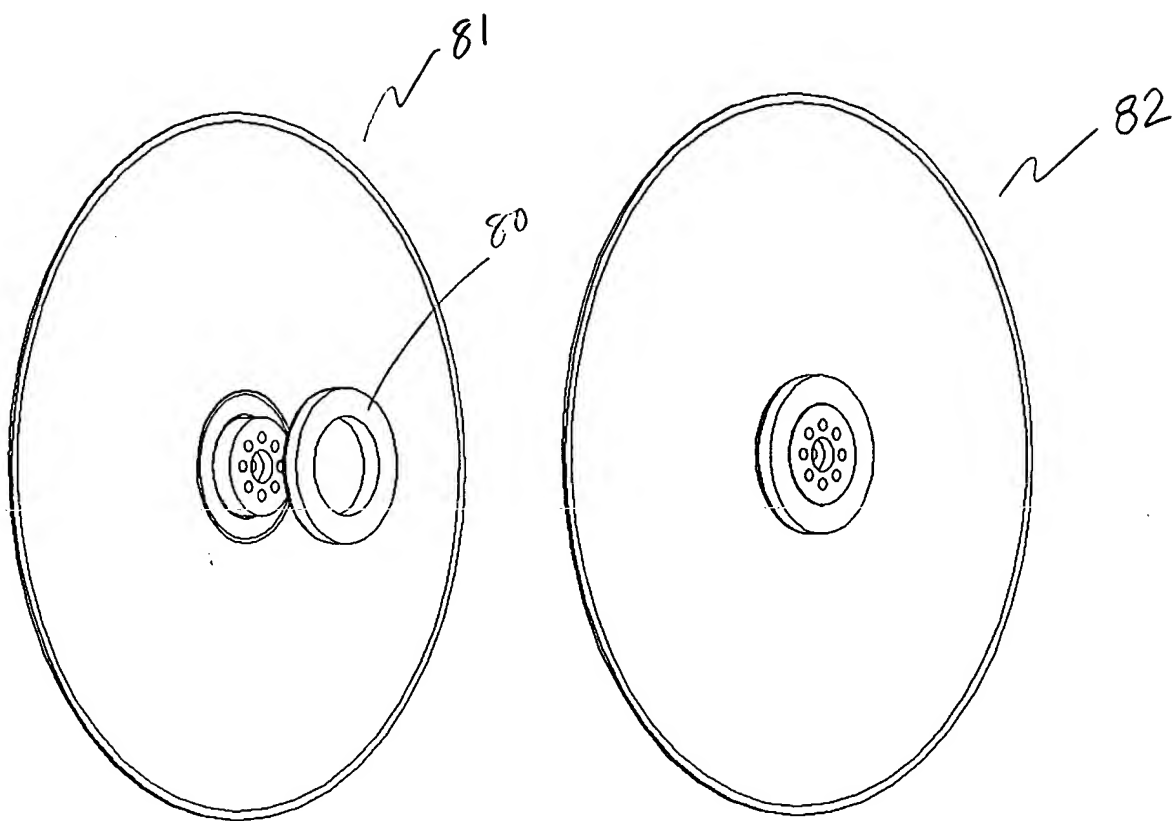


FIGURE 8 PROCESSING BAG ASSEMBLY

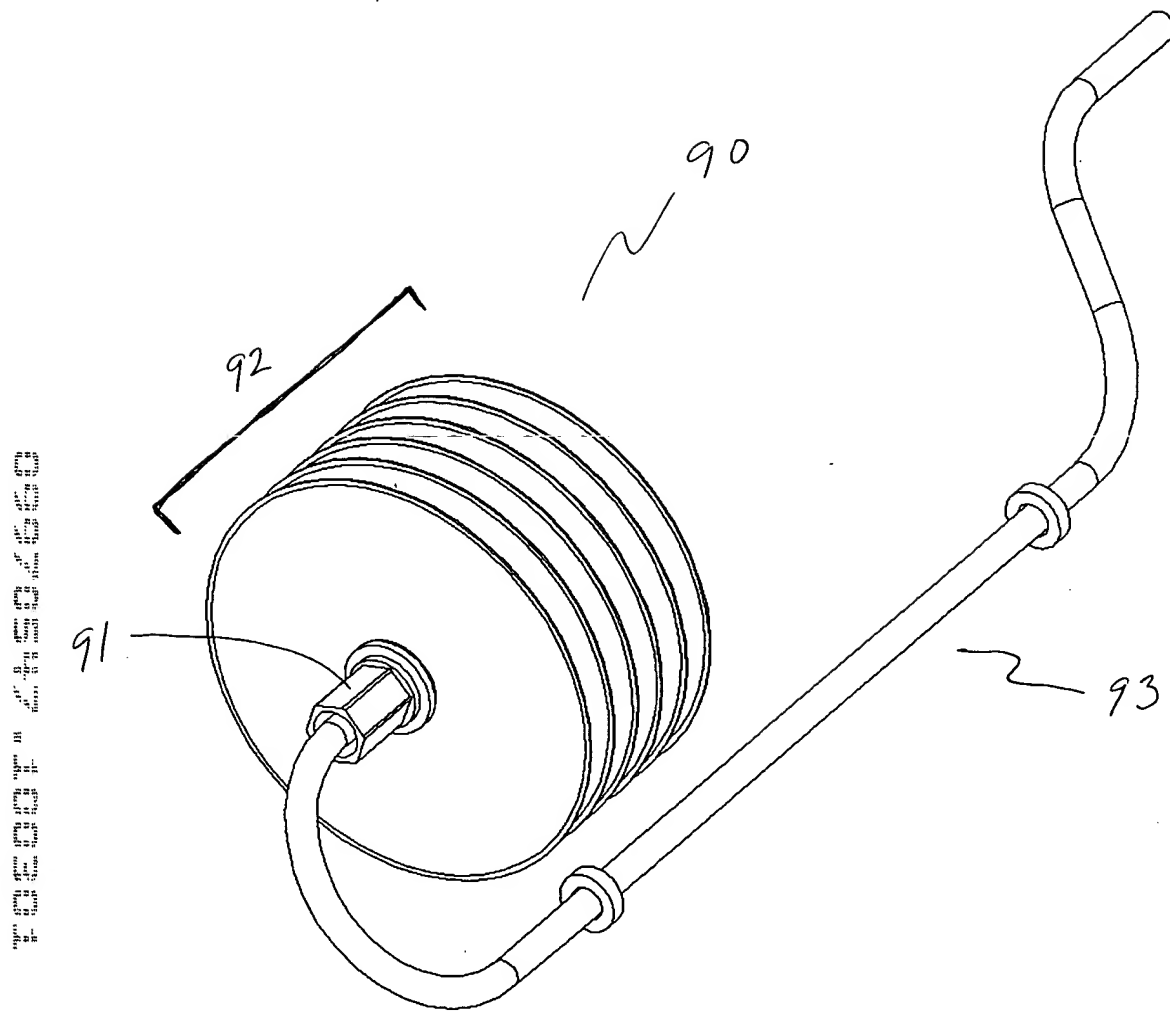


FIGURE 9 BAG SET ASSEMBLY

Fig. 10 is a perspective view of the device in accordance with the present invention, showing the device in a closed position. The device is a circular disc with a central hub and a rim. The hub has a central opening and is surrounded by a series of small holes. The rim is a thick, flat ring. The device is shown in a perspective view, with the hub and rim clearly visible. The central opening is a small circle in the center of the hub. The small holes are arranged in a circular pattern around the central opening. The rim is a thick, flat ring that surrounds the hub. The device is shown in a closed position, with the hub and rim facing each other.

94

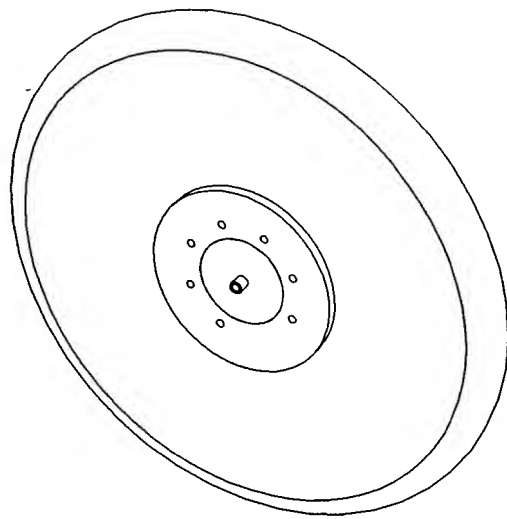


Fig. 10

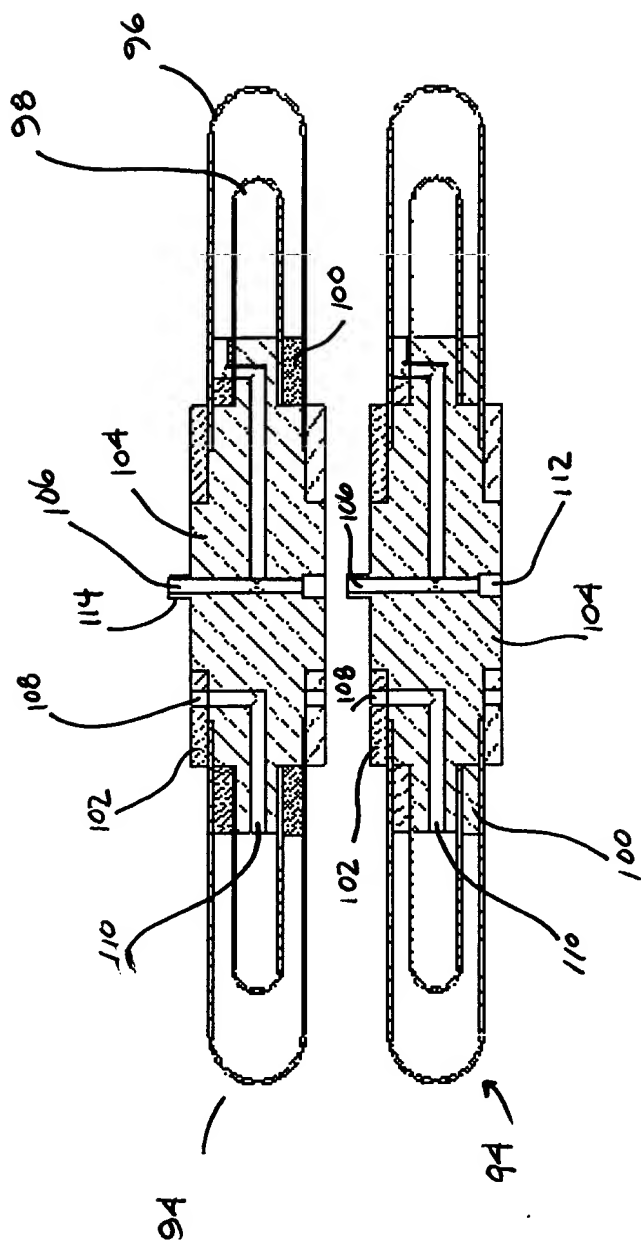


Fig. 11

